

Precision voltage regulator

μ A723/723C


DESCRIPTION

The μ A723/ μ A723C is a monolithic precision voltage regulator capable of operation in positive or negative supplies as a series, shunt, switching, or floating regulator. The 723 contains a temperature-compensated reference amplifier, error amplifier, series pass transistor, and current limiter, with access to remote shutdown.

FEATURES

- Positive or negative supply operation
- Series, shunt, switching, or floating operation
- 0.01% line and load regulation
- Output voltage adjustable from 2V to 37V
- Output current to 150mA without external pass transistor
- μ A723 MIL-STD-883A, B, C available


PIN CONFIGURATION

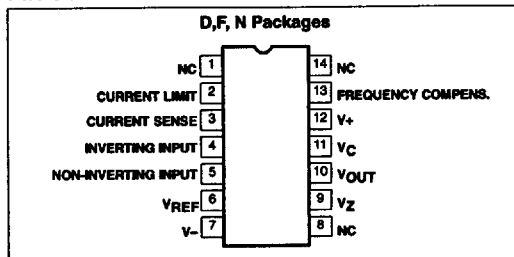

ORDERING INFORMATION

| DESCRIPTION | TEMPERATURE RANGE | ORDER CODE | DWG # |
|--|-------------------|--------------|-------|
| 14-Pin Ceramic Dual In-Line Package (CERDIP) | -55°C to 125°C | μ A723F | 0581B |
| 14-Pin Plastic Dual In-Line Package (DIP) | 0 to 70°C | μ A723CN | 0405B |
| 14-Pin Plastic Small Outline (SO) Package | 0 to 70°C | μ A723CD | 0175D |

EQUIVALENT CIRCUIT

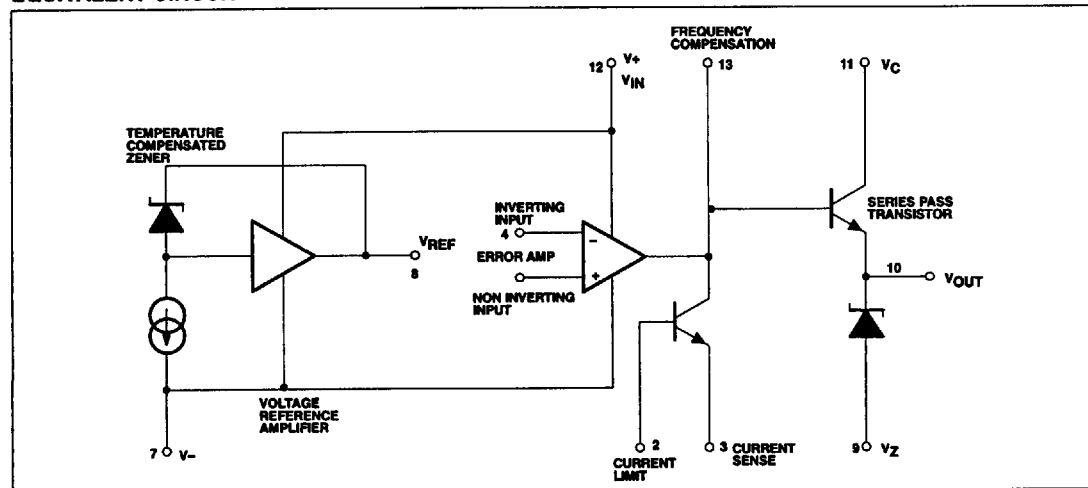

Precision voltage regulator

 μ A723/723C

ABSOLUTE MAXIMUM RATINGS

| SYMBOL | PARAMETER | RATING | UNIT |
|------------|---|-------------|------------------|
| | Pulse voltage from V_+ to V_- (50ms) | 50 | V |
| | Continuous voltage from V_+ to V_- | 40 | V |
| | Input-output voltage differential | 40 | V |
| V_{DIFF} | Error amplifier maximum input differential voltage | ± 5 | V |
| V_{CM} | Error amplifier non-inverting input (Pin 5) to $-V$ (Pin 7) | 8 | V |
| I_{OUT} | Maximum output current | 150 | mA |
| | Current from V_{REF} | 15 | mA |
| | Current from V_Z | 25 | mA |
| P_{MAX} | Maximum power dissipation $T_A=25^\circ\text{C}$ (still-air) ¹ | | |
| | F package | 1190 | mW |
| | N package | 1420 | mW |
| | D package | 1040 | mW |
| T_A | Operating ambient temperature range | | |
| | μ A723 | -55 to +125 | $^\circ\text{C}$ |
| | μ A723C | 0 to 70 | $^\circ\text{C}$ |
| T_{STG} | Storage temperature range | -65 to +150 | $^\circ\text{C}$ |
| T_{SOLD} | Lead soldering temperature (10sec max) | 300 | $^\circ\text{C}$ |

NOTES:

- The following derating factors should be applied above 25°C
F package at $9.5\text{mW}/^\circ\text{C}$
N package at $11.4\text{mW}/^\circ\text{C}$
D package at $8.3\text{mW}/^\circ\text{C}$

Precision voltage regulator

 μ A723/723C

DC ELECTRICAL CHARACTERISTICS

 $T_A=25^\circ\text{C}$, unless otherwise specified.¹

| SYMBOL | PARAMETER | TEST CONDITIONS | μ A723 | | | μ A723C | | | UNITS |
|--|---|--|------------|--------------|------------|-------------|-------------|------------|---------------------|
| | | | Min | Typ | Max | Min | Typ | Max | |
| $V_{R\text{ LINE}}$ | Line regulation ² | $V_{IN}=12\text{V}$ to $V_{IN}=15\text{V}$ $V_{IN}=12\text{V}$ to $V_{IN}=40\text{V}$ | | 0.01 0.02 | 0.1 0.2 | | 0.01 0.1 | 0.1 0.5 | % V_{OUT} |
| $V_{R\text{ LOAD}}$ | Load regulation ² | $I_L=1\text{mA}$ to $I_L=50\text{mA}$ | | 0.03 | 0.15 | | 0.03 | 0.2 | % V_{OUT} |
| $\Delta V_{IN}/\Delta V_O$ | Ripple Rejection | $f=50\text{Hz}$ to 10kHz , $C_{REF}=0$ | | 74 | | | 74 | | dB |
| | | $f=50\text{Hz}$ to 10kHz , $C_{REF}=5\mu\text{F}$ | | 86 | | | 86 | | |
| I_{OS} | Short-circuit current | $R_{SC}=10\Omega$, $V_{OUT}=0$ | | 65 | | | 65 | | mA |
| V_{REF} | Reference voltage | $I_{REF}=0.1\text{mA}$ | 6.95 | 7.15 | 7.35 | 6.80 | 7.15 | 7.50 | V |
| $V_{REF\text{ (LOAD)}}$ | Reference voltage change with load | $I_{REF}=0.1\text{mA}$ to 5mA | | | 20 | | | 20 | mV |
| V_{NOISE} | Output noise voltage | $BW=100\text{Hz}$ to 10kHz , $C_{REF}=0$ | | 20 | | | 20 | | μV_{RMS} |
| | | $BW=100\text{Hz}$ to 10kHz , $C_{REF}=5\mu\text{F}$ | | 2.5 | | | 2.5 | | |
| S | Long-term stability | $T_J=T_{Jmax}$, $T_A=25^\circ\text{C}$ for end point measurement | | 0.1 | | | 0.1 | | %1000 hrs. |
| I_{SCD} | Standby current drain | $I_L=0$, $V_{IN}=30\text{V}$ | | 2.3 | 3.5 | | 2.3 | 4.0 | mA |
| V_{IN} | Input voltage range | | 9.5 | | 40 | 9.5 | | 40 | V |
| V_{OUT} | Output voltage range | | 2.0 | | 37 | 2.0 | | 37 | V |
| V_{DIFF} | Input-output voltage differential | | 3.0 | | 38 | 3.0 | | 38 | V |
| The following specifications apply over the operating temperature ranges. | | | | | | | | | |
| $V_{R\text{ LINE}}$ | Line regulation | $V_{IN}=12\text{V}$ to $V_{IN}=15\text{V}$ | | | 0.3 | | | 0.3 | % V_{OUT} |
| $V_{R\text{ LOAD}}$ | Load regulation | $I_L=1\text{mA}$ to $I_L=50\text{mA}$ | | | 0.6 | | | 0.6 | % V_{OUT} |
| TC | Average temperature coefficient of output voltage | | | 0.002 | 0.015 | | 0.003 | 0.015 | %/ $^\circ\text{C}$ |


NOTES:

- $V_{IN}=V_+=V_C=12\text{V}$, $V_-=0\text{V}$, $V_{OUT}=5\text{V}$, $I_L=1\text{mA}$, $R_{SC}=0$, $C_1=100\text{pF}$, $C_{REF}=0$ and divider impedance as seen by error amplifiers $\leq 10\text{k}\Omega$.
- The load and line regulation specifications are for constant junction temperature. Temperature drift effects must be taken into account separately when the unit is operating under conditions of high dissipation.

Precision voltage regulator

μ A723/723C


TYPICAL PERFORMANCE CHARACTERISTICS

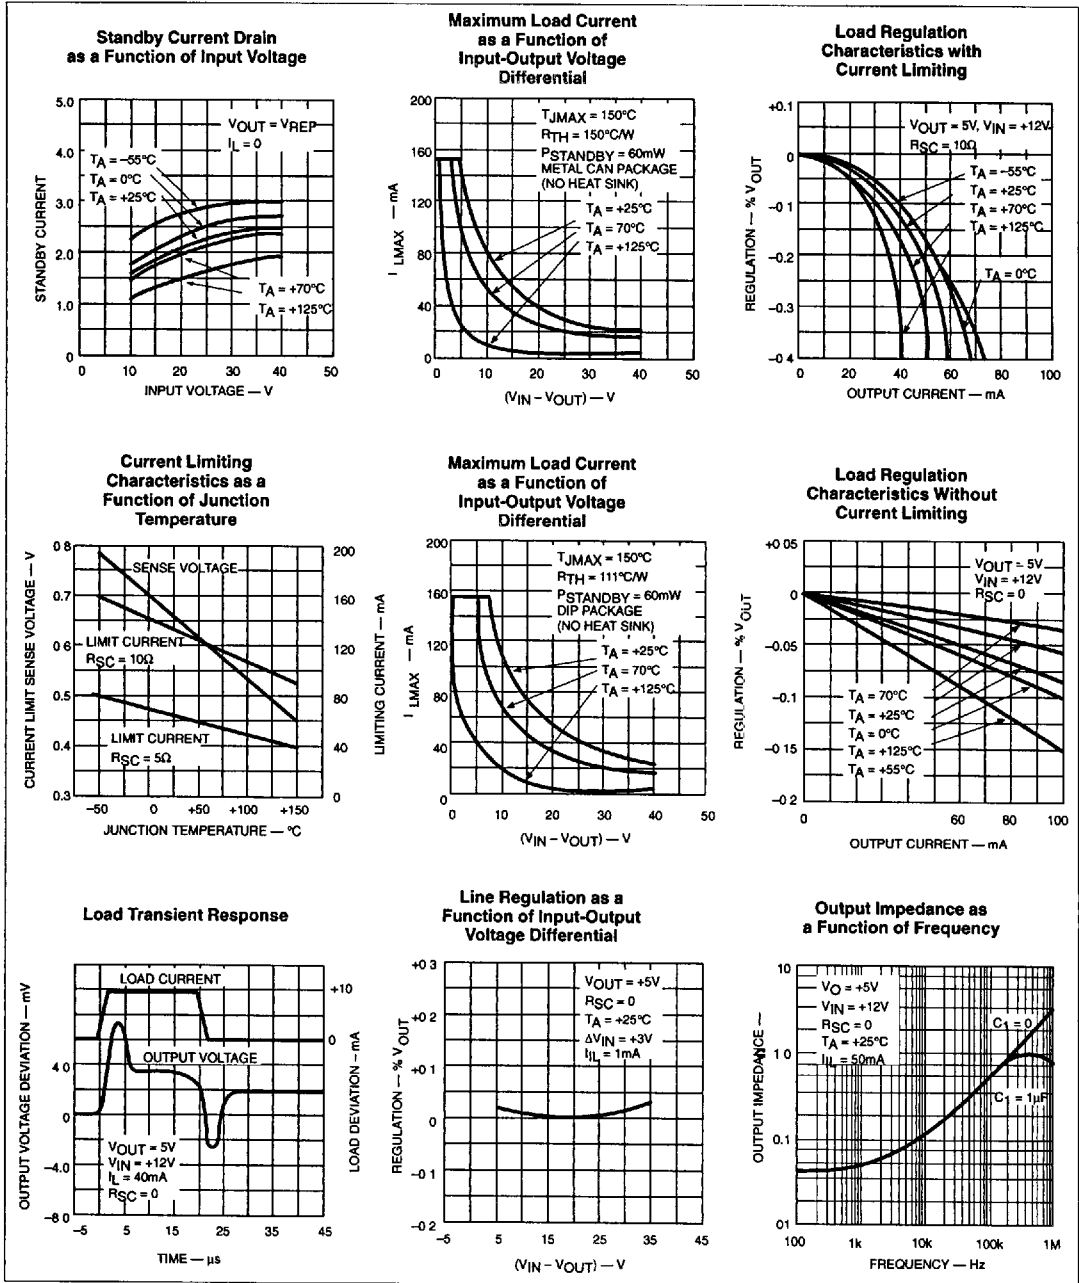


Precision voltage regulator

μA723/723C

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

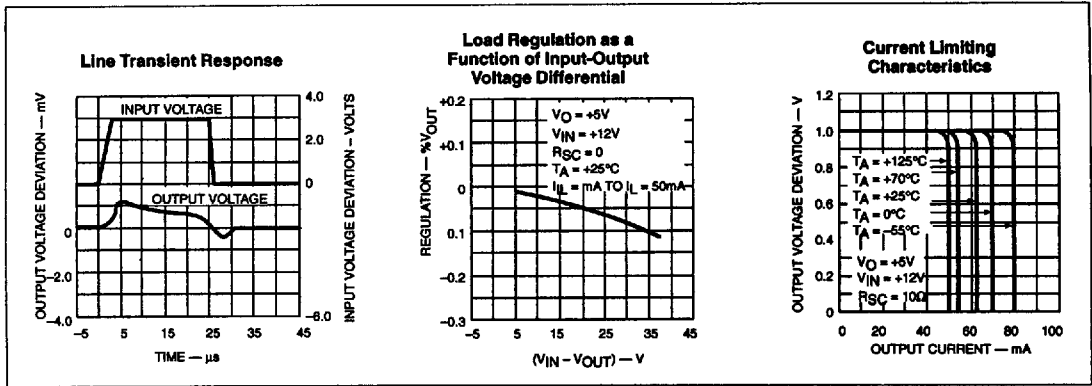


TYPICAL APPLICATIONS

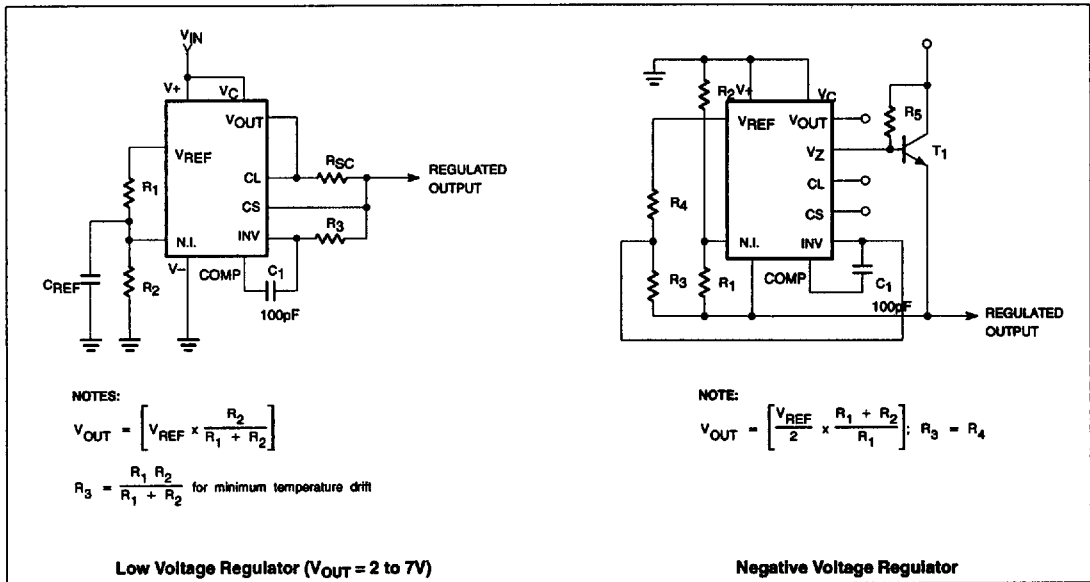

Precision voltage regulator

µA723/723C


TYPICAL APPLICATIONS (Continued)

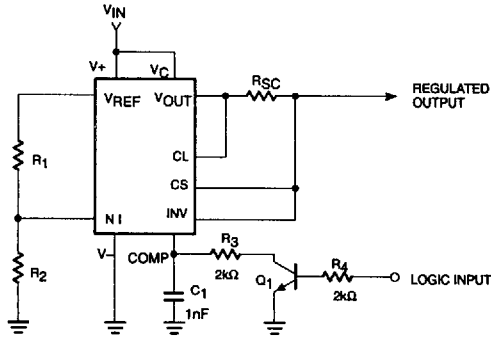

NOTE:

$$V_{OUT} = \left[V_{REF} \times \frac{R_2}{R_1 + R_2} \right]$$

Remote Shutdown Regulator With Current Limiting ($V_{OUT} = 2$ to $7V$)

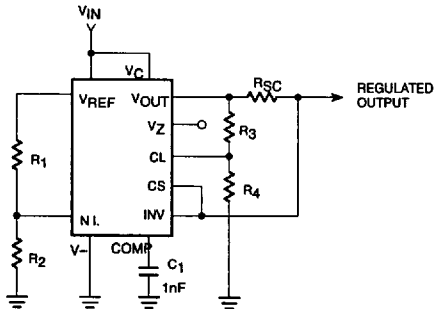


NOTES:

$$I_{KNEE} = \left[\frac{V_{OUT} R_3}{R_{SC} R_4} + \frac{V_{SENSE} (R_3 + R_4)}{R_{SC} R_4} \right]$$

$$V_{OUT} = \left[V_{REF} \times \frac{R_1 + R_2}{R_4} \right]$$

$$I_{SHORT\ CKT} = \left[\frac{V_{SENSE}}{R_{SC}} \times \frac{R_3 + R_4}{R_4} \right]$$

Foldback Current Limiting Regulator ($V_{OUT} = 2$ to $7V$)

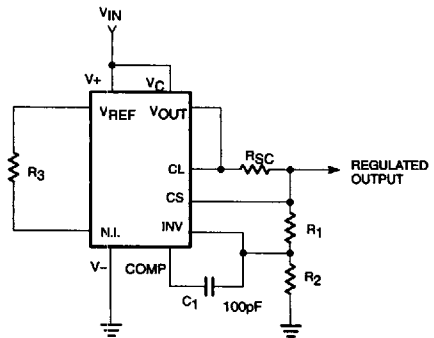


NOTE:

$$V_{OUT} = \left[V_{REF} \times \frac{R_2}{R_1 + R_2} \right]; R_3 = R_4$$

$$R_3 = \frac{R_1 R_2}{R_1 + R_2} \text{ for minimum temperature drift}$$

R_3 may be eliminated for minimum component count

High Voltage Regulator ($V_{OUT} = 7$ to $37V$)



NOTES:

$$\frac{R_4}{R_3} = \frac{V_{OUT} I_{SC}}{V_{SENSE} (I_{KNEE} - I_{SHORT\ CKT})} - 1$$

$$R_{SC} = \frac{V_{SENSE}}{I_{SC}} \left[1 + \frac{R_3}{R_4} \right]$$